

## KEY FEATURES AND SPECIFICATIONS




	TCX58	TCX59	TCX53H	TCX51H	TCX50H	TCX53E	TCX51E	TCX50E	TCX53A	TCX51A	TCX50A
						"E" Version (Electric)			"A" Version (Air)		
Leverless Mount Head (w/ protection)		☑									
Standard Mount Head (w/protection)	☑										
Plastic Mount Head (w/protection)			☑	☑	☑	☑	☑	☑	☑	☑	☑
Power w/Memory Swing Arm	☑	☑									
Manual Swing Arm			☑	☑	☑	☑	☑	☑	☑	☑	☑
PowerOut Side Shovel	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
Match Mounting Capable	☑	☑									
Rim Diameter Range	10–26" External 12–28" Internal										
Maximum Tire Diameter	45"					46"					
Maximum Wheel Width	14"										
Power Requirements	208–230V, 6A, 50/60Hz, 1ph, NEMA L6-20P					110-120V, 1ph, 50/60Hz, 12A, NEMA L5-15P			N/A		
						208-220V, 1ph, 50/60Hz, 6A, NEMA L6-20P					
Drive	7 and 17 rpm CW, 7 rpm CCW					10 rpm CW and CCW			~10 rpm CW and CCW		
Air Supply	110–145 psi (8–10 bar)										
Shipping Weight	1103 lbs (500kg)	1116 lbs (506kg)	911 lbs (413kg)	807 lbs (366kg)	732 lbs (332kg)	869 lbs (394kg)	765 lbs (347kg)	690 lbs (313kg)	849 lbs (385kg)	745 lbs (338kg)	670 lbs (304kg)
Shipping Weight w/wheel lift	1189 lbs (539kg)	1202 lbs (545kg)	997 lbs (452kg)	893 lbs (405kg)	818 lbs (371kg)	995 lbs (433kg)	851 lbs (386kg)	776 lbs (352kg)	935 lbs (424kg)	831 lbs (377kg)	756 lbs (343kg)
Width (W)	55" (1397mm)				40" (1016mm)	52" (1626mm)		34" (914mm)	52" (1626mm)		34" (914 MM)
Height (H)	82" (2082mm)										
Depth (D)	58" (1473mm)			47" (1194mm)							

\* Add 14 in. to depth for wheel lift

For tire changer information visit:  
[www.hunter.com/tire-changers](http://www.hunter.com/tire-changers)

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

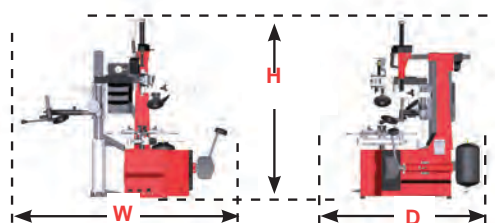

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

Form CS07842-00, 06-21  
 Copyright © 2017-2021, Hunter Engineering Company